











BA Bin Activators SOLIDS DISCHARGING EQUIPMENT

The BA Bin Activator is a discharging device which, thanks to controlled vibration, ensures continuous down-flow of the material from silos and hoppers.

Using this device ensures product extraction with optimum "Mass Flow".

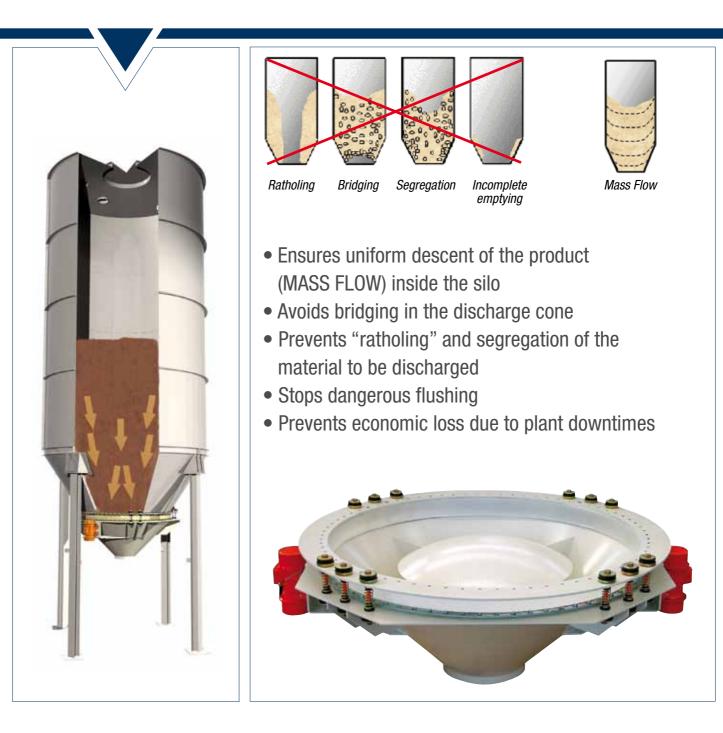

- Turned cone constructed using industrial techniques
- Seamless discharging cone
- High flowability
- Maximum resistance to stress
- Available with food-grade painting and in 304L SS



- Maximum efficiency
- Minimum vibration energy consumption
- Minimum vibrations transmitted to silo












T A T

Decompressor

OPTIONS & ACCESSORIES


TYPE Size ØΑ B C H Motors kg STD BA040 400 380 427 330 59 114 1 BA060 168 580 519 408 80 600 1 BA075 750 219 730 609 99 456 1 BA090 900 219 880 531 134 684 1 980 BA100 1,000 273 734 555 1 146 BA125 1,250 273 1,230 937 730 290 1 BA150 323 774 475 1,500 1,480 1,120 1 924 BA180 1,800 323 1,780 1,194 2 726 BA210 2,080 1,033 881 2,100 406 1,420 2 BA235 2,350 406 2,330 1,547 1,166 2 1,255 BA250 2,480 1,705 1,307 1,530 2,500 406 2 BA300 3,000 2 406 2,980 1,955 1,568 2,456 Dimensions in mm







Negative pressure version for silos

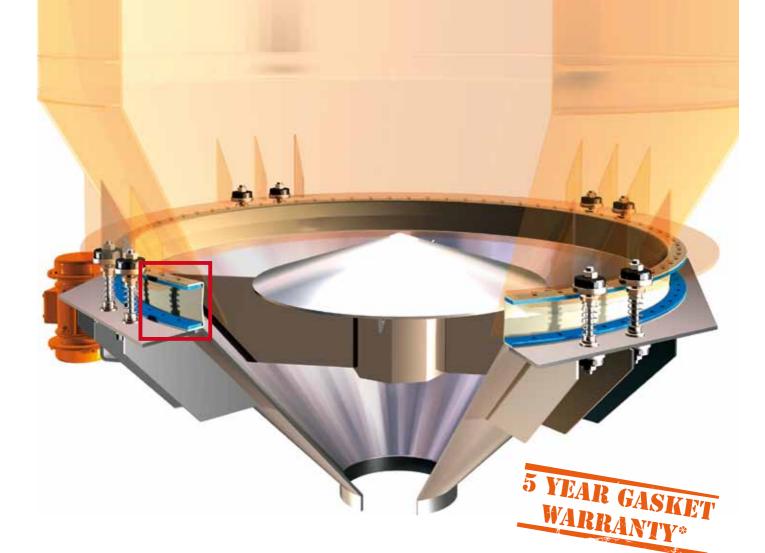

GASKET WITH MAXIMUM RELIABILITY:

- Seamless one-piece without joints for maximum resistance to stress
- Double flange for perfect fixing and optimum sealing
- Construction in wear-resistant SINT[®] food-grade engineering polymer
- Design studied to prevent stagnation, ideal for food and perishable products





* The validity of the warranty is conditioned by strict respect of the conditions of use described in the Installation, Use & Maintenance Manual.

APPLICATIONS



- Food
- Flour milling
- Animal feed milling
- Plastics

- Chemicals
- Pharmaceuticals
- Glass
- Fertilizers

- Waste water treatment
- Foundries
- Premixed adhesives for ceramics industry







www.wamgroup.com